

PS05 Flush-mounted power supply


230V/3.3V, with battery replacement



The PS05 flush-mounted power supply unit can serve as an external 3.3V power source for a wide range of ELDAT products.

To do this, the included battery replacement is inserted into the products in place of the standard CR2032 battery, providing the device with continuous power.

A single flush-mounted power supply unit can power up to 10 devices, for example, several wall-mounted push-buttons installed in a combination frame can be powered by just one unit.

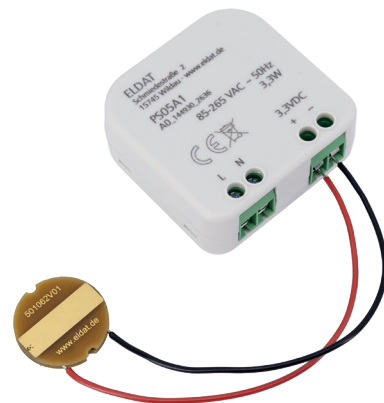

PS05A1-K

Technical specifications

Power supply	85-265 V AC, 50 Hz
Power consumption	0,18 W standby 3,30 W max.
Output	3,3V DC SELV
Output power	3 W max.
Operating temperature	-20 °C to +60 °C
Dimensions (W/L/H)	43/42/17,5 mm
Weight	25 g (power supply) 3 g (battery replacement)

Battery replacement

Design	CR2032
Wire cross-section	0,25 mm min.
Wire length	105 mm (10 m max.)

Scope of delivery

- Flush-mounted power supply
- Battery replacement
- Operating manual


Accessories (optional)

PS05-ACC-01	Battery replacement, CR2032
-------------	-----------------------------

Components



Flush-mounted power supply



Battery replacement
PS05-ACC-01

Models

Product number	Description
PS05A1-K	Flush-mounted power supply, 230V/3.3V, with battery replacement, CR2032