


RTS17 Built-in transmitter

The RTS17 built-in transmitter can be connected to a live power source of between 5V and 24VAC or 6V and 32VDC.

As soon as the transmitter is supplied with power, it transmits a telegram with the transmission code A for a maximum of 10 seconds.

Usually this built-in transmitter is used to forward ringing signals from a standard bell system to the RCP24 radio bell.

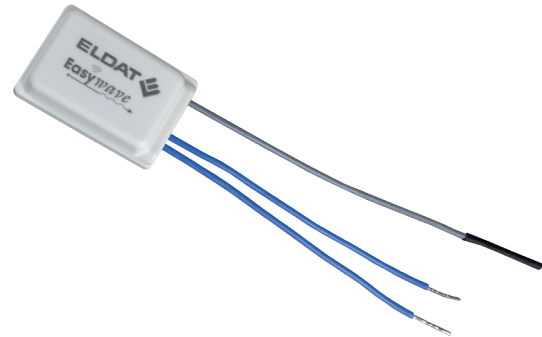


RTS17E5001A01-K

Technical specifications

Coding	factory coding with Easywave telegram
Frequency	868.30 MHz
Channels	1
Range	typically 150 m in good free-field conditions
Power supply	5V - 24VAC, 6V - 32VDC
Power consumption	0.40W at 24VAC, 0.38W at 32VDC
Operation	via the connected power source
Function	depends on the receiver (see models)
Operating temperature	-20 °C to +60 °C
Dimensions	18x26,5x 12mm (without connecting wires)
Weight	5g

Wiring diagram

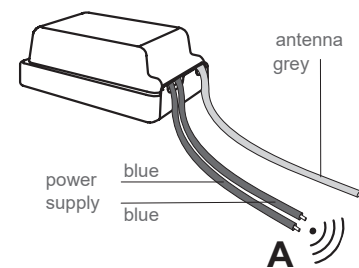

Scope of delivery

- Built-in transmitter
- Operating manual

Models

Product numbers	Description	Function
RTS17E5001A01-K	Built-in transmitter 1-channel	1x PULSE