


# RTS17 Built-in transmitter

## PULSE



The RTS17 built-in transmitter can be connected to a live power source of between 5V and 24 V AC or 6 V and 32 V DC. As soon as the transmitter is supplied with power, it transmits a telegram with the transmission code A for a maximum of 10 seconds.

Usually this built-in transmitter is used to forward ringing signals from a standard bell system to the RCP24 radio bell.

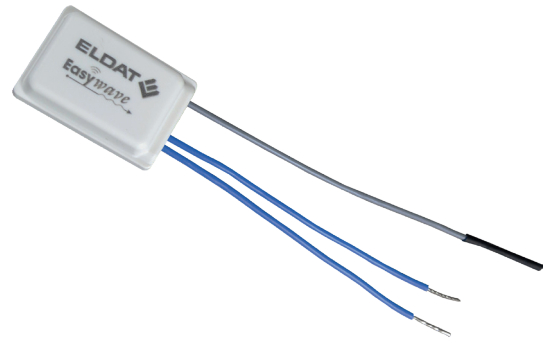


RTS17E5001A1-K

### Technical specifications

Coding	Easywave
Frequency	868.30 MHz
Channels	1
Range	typically 150 m in good free-field conditions
Power supply	5 V - 24 V AC 6 V - 32 V DC
Transmission current	approx. 11 mA
Operation	via the connected power source
Operating temperature	-20 °C to +60 °C
Dimensions (W/L/H)	18/26,5/12 mm (without connecting wires)
Weight	5 g

### Wiring diagram

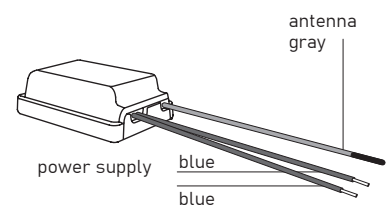

### Scope of delivery

- Built-in transmitter
- Operating manual

### Models

Product number	Description
RTS17E5001A1-K	Built-in transmitter, Easywave, 1x PULSE, 5-24V AC / 6-32V DC